


TALPE – ČELIČNI PROFILI - LARSEN



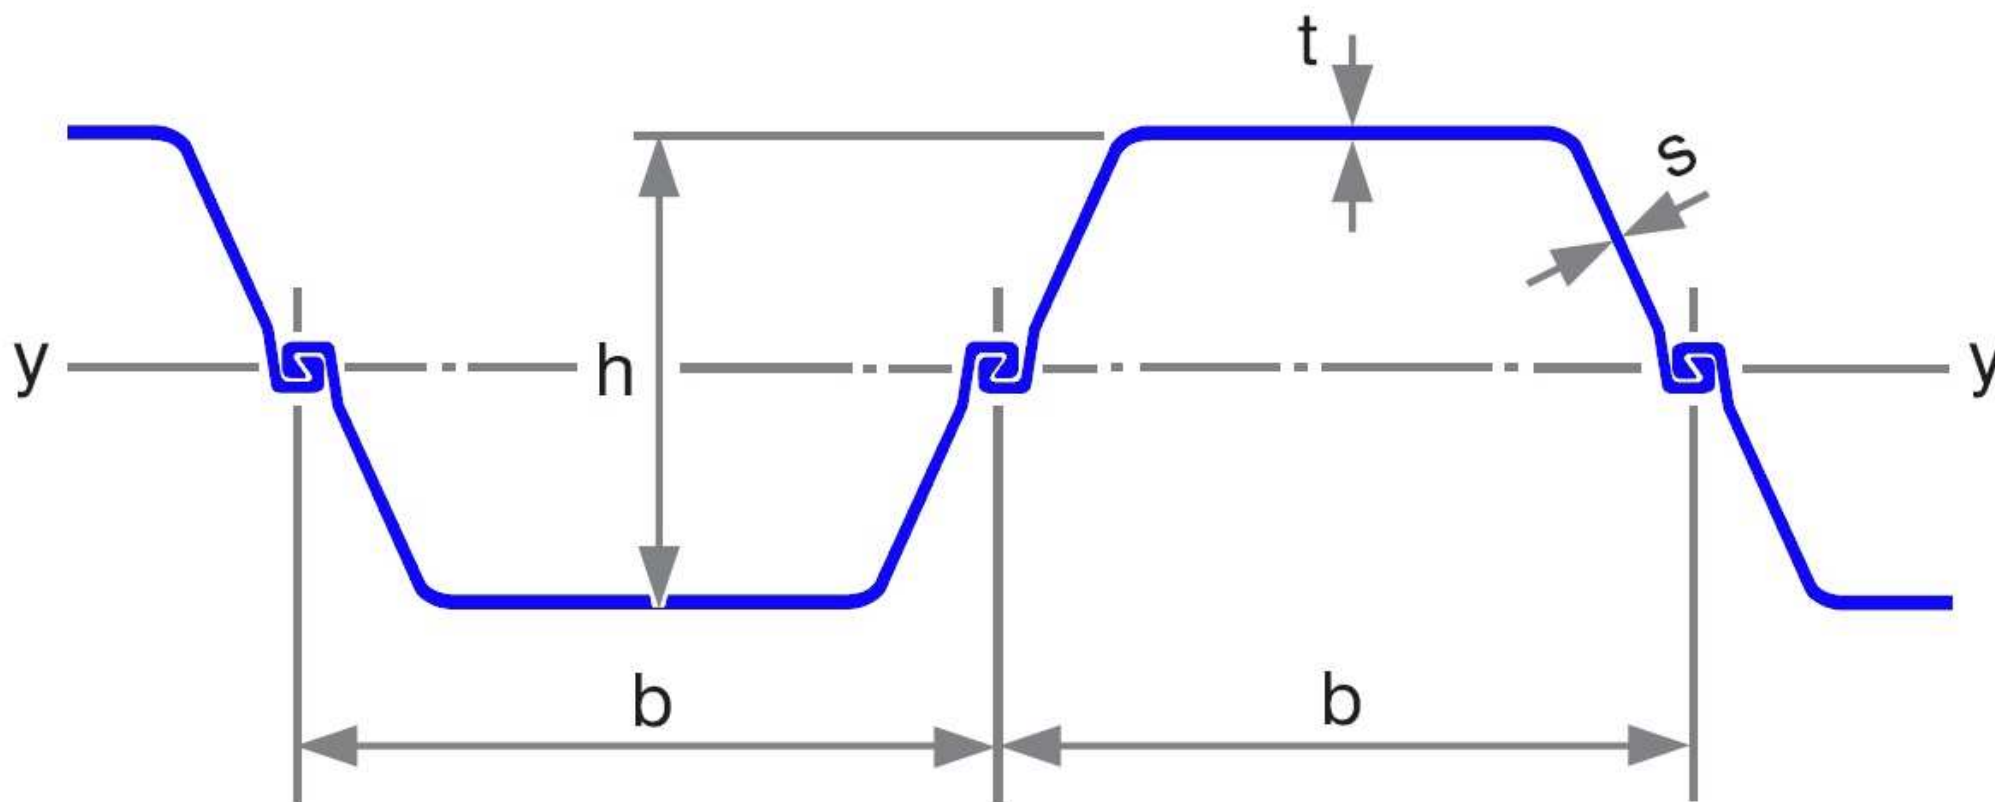

d.o.o.

10090 ZAGREB, Prigornica 2

Tel: +385 1 3492 672

Fax: +385 1 3492 674

www.eviz.hrinfo@eviz.hr

	Otporni moment		Vlastita težina		Površinski moment 2. stepena	Debljina leđa	Debljina pregrade	Visina pregrade	Širina profila
	$W_y^{3)}$				I_y	t	s	h	b
	cm ³ /m	cm ³ / Pojed. talpe	kg/m ²	kg/m	cm ⁴ /m	mm	mm	mm	mm
	Pregrada	Pojed. talpe	Pregrada	Pojed. talpe	Pregrada				
LARSEN – Profili									
LARSEN 755	2000	580	127,5	95,6	45000	11,7	10,0	450	750
LARSEN 703	1210	414	96,4	67,5	24200	9,5	8,0	400	700
LARSEN 703 K	1300	426	103,0	72,1	25950	10,0	9,0	400	700
LARSEN 703 10/10 ³⁾	1340	437	108,0	75,6	26800	10,0	10,0	400	700
LARSEN 704	1600	529	115,0	80,5	35200	10,2	9,5	440	700
LARSEN 600	510	130	94,0	56,4	3825	9,5	9,5	150	600
LARSEN 600 K	540	133	99,0	59,4	4050	10,0	10,0	150	600
LARSEN 601	745	251	78,0	46,8	11520	7,5	6,4	310	600
LARSEN 602	830	265	89,0	53,4	12870	8,2	8,0	310	600
LARSEN 603	1200	330	108,0	64,8	18600	9,7	8,2	310	600
LARSEN 603 K	1240	340	113,5	68,1	19220	10,0	9,0	310	600
LARSEN 603 10/10 ³⁾	1260	350	116,0	69,6	19530	10,0	10,0	310	600
LARSEN 604 n	1600	415	123,0	73,8	30400	10,0	9,0	380	600
LARSEN 605	2020	520	139,2	83,5	42420	12,5	9,0	420	600
LARSEN 605 K	2030	537	144,5	86,7	42630	12,2	10,0	420	600